


GEARMOTOR SERIES DVE4



Integrated gearmotor with double worm and compact design, it fits for thermal and shading screens where the need shaft velocity is higher (5 RPM); its compact size allows for an easy mounting on every type of structure or greenhouse.

The gearmotor is supplied with stainless steel direct shaft of Ø27 or with chain coupling. It comes complete with a limit switch with double safety micro-sensor to avoid phase reversal. Setting gears inside the casing. RPM according to your requirements (42-53-82 shaft revolution). The gearbox is in sandblasted aluminium box and its components are mounted on bearings. The gearmotor is furnished with a hex socket screw that allows the manual use of the unit, in case of blackout, with a battery-operated screwdriver. The equipped standard motors work with 50-60 Hz frequency, can be supplied with the UL/CSA Certification and/or in single-phase power with double capacitor or circuit breaker for a higher starting current.

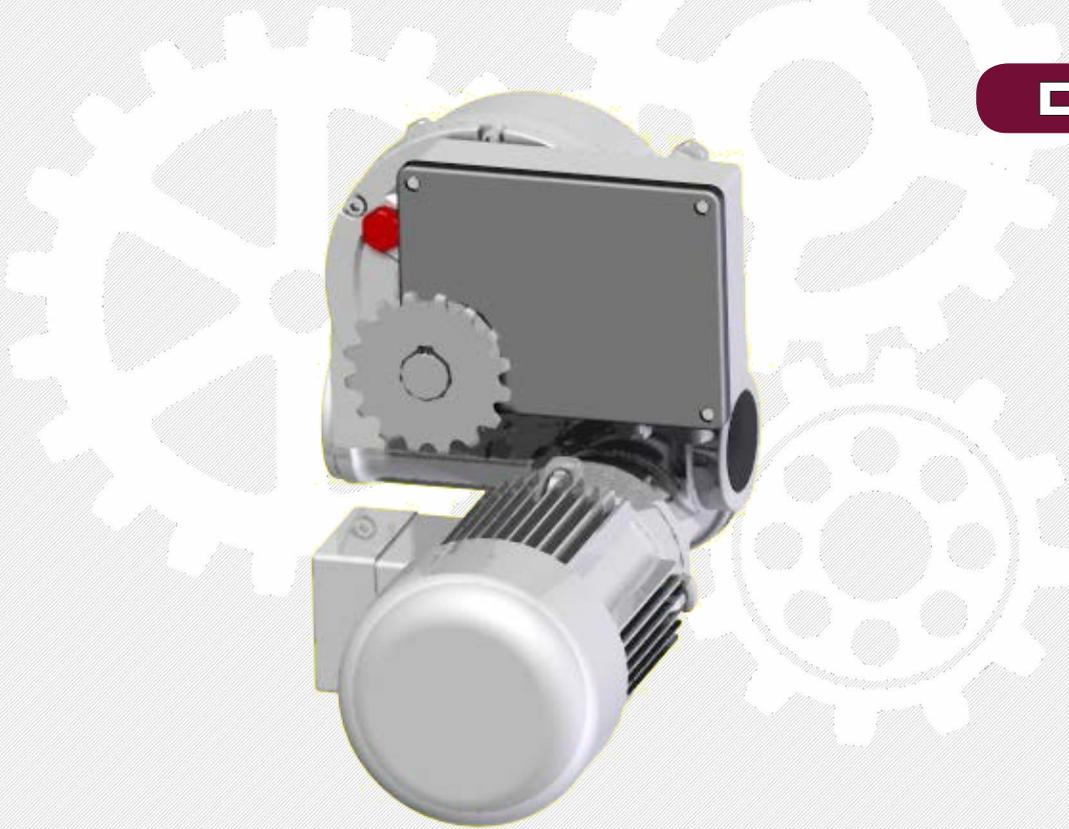

DVE4

The electric motors used by Viale Sistemi comply with CE regulations and are considered duty Type S3 - 70% (intermittent periodic duty) in compliance with the classification of new Std. IEC 60034-1.

CODE/PRODUCT	3 Ph - 50 Hz / 60 Hz					
	kW	A	V	RPM	Nm	kg
DVE4*1450-.....	0.37	1.2	230-440	5	270	22
DVE4*1475-.....	0.55	1.7	230-440	5	350	22
DVE4*141-.....	0.75	2.1	230-440	5	420	22

CODE/PRODUCT	1 Ph - 50 Hz					
	kW	A	V	RPM	Nm	kg
DVE4*141M-.....	0.75	5	230	5	350	23